

# PL




## 榮風直翼式離心吸塵抽送風機

### RONG FONG PLATE FANS


本機葉輪葉片為直翼扇型，葉輪堅固且粉塵不易附著於葉片，可耐高含塵和高腐蝕之磨損，最適合木業加工，石粉，金屬研磨，紙屑，木屑，化工原料，纖維等集塵輸送。

The fan blades are plate shaped and robustly constructed against wear from powder dust and corrosion.


Suitable for collection and transfer of dust and powdery intensive industries, such as, processing of timber, stone, marble, granite, metal, paper wood, chemical fibres, etc.

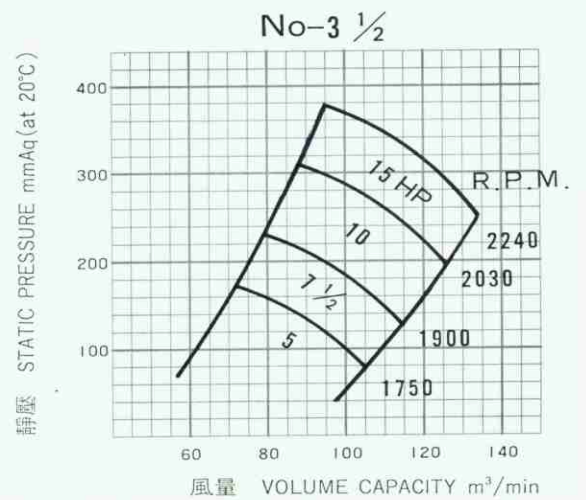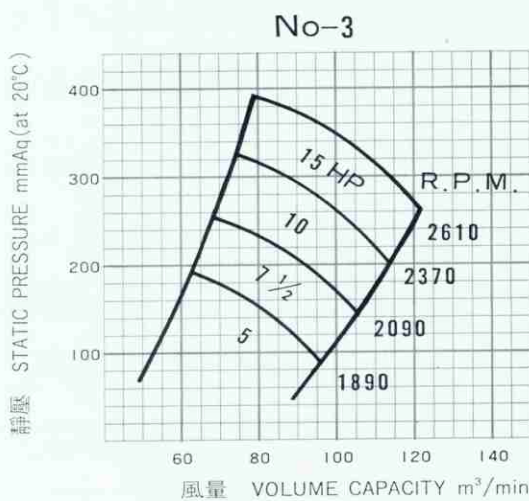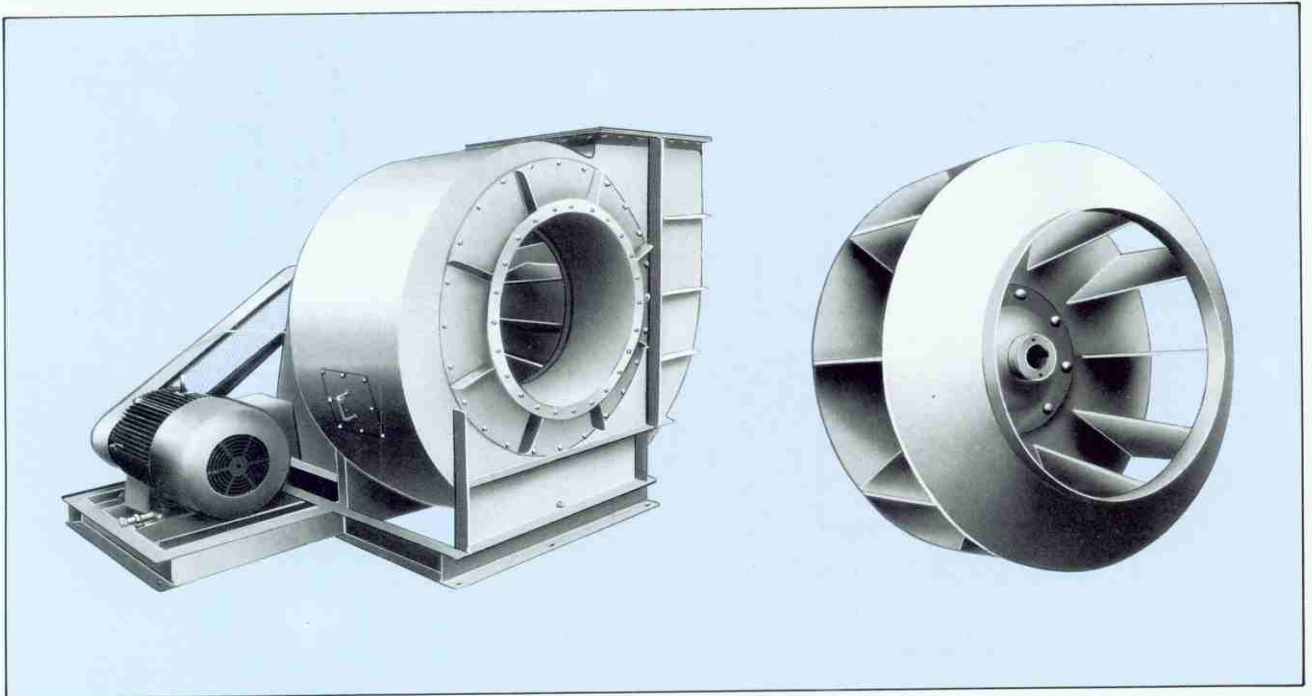


靜壓 STATIC PRESSURE mmAq(at 20°C)

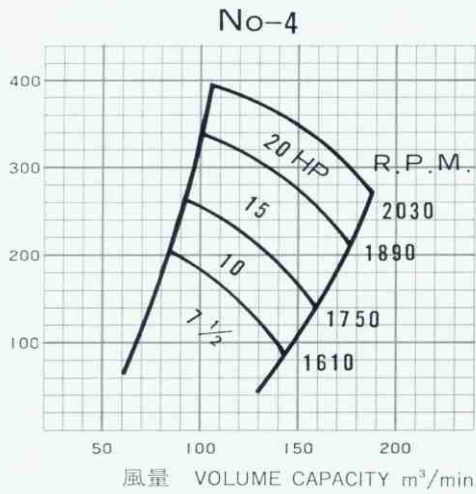


靜壓 STATIC PRESSURE mmAq(at 20°C)

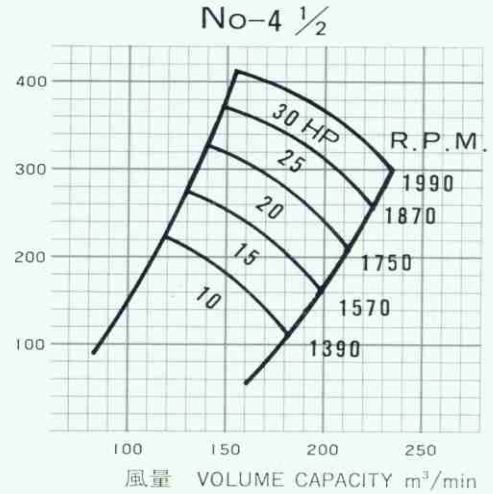


靜壓 STATIC PRESSURE mmAq(at 20°C)

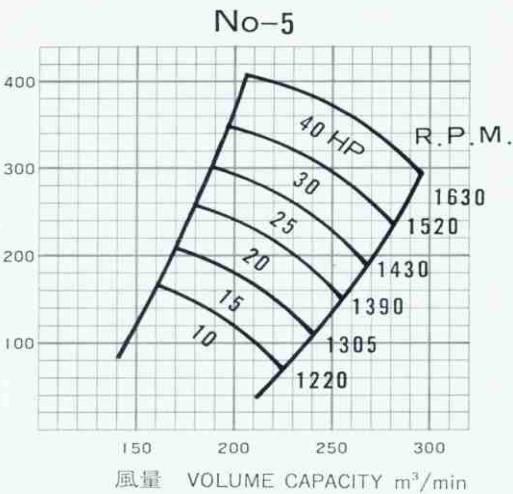


靜壓 STATIC PRESSURE mmAq(at 20°C)






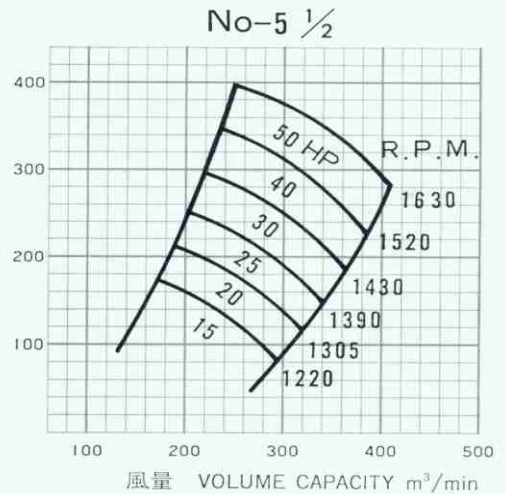


靜壓 STATIC PRESSURE mmAq(at 20°C)

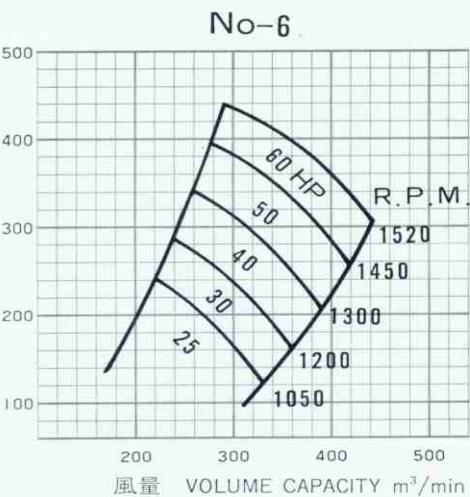

靜壓 STATIC PRESSURE mmAq(at 20°C)

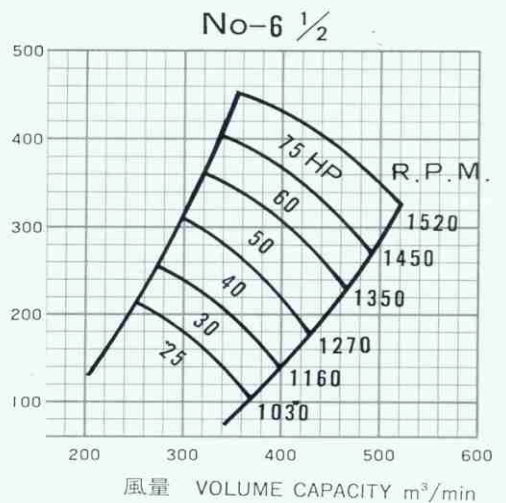


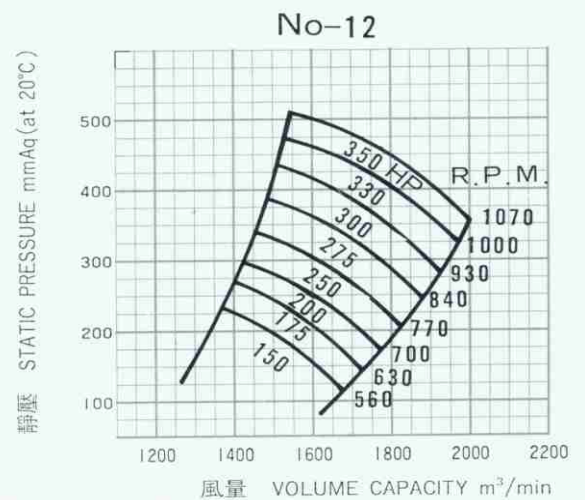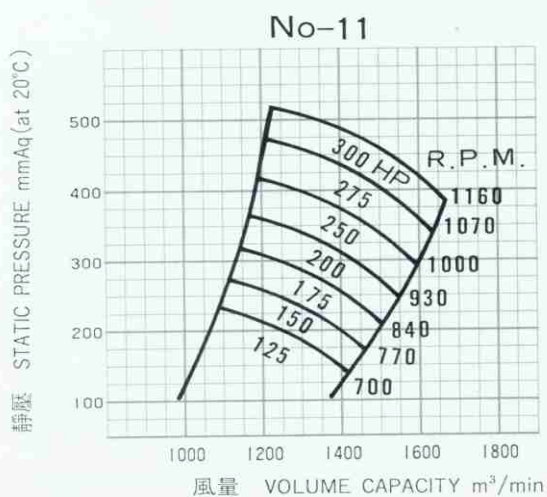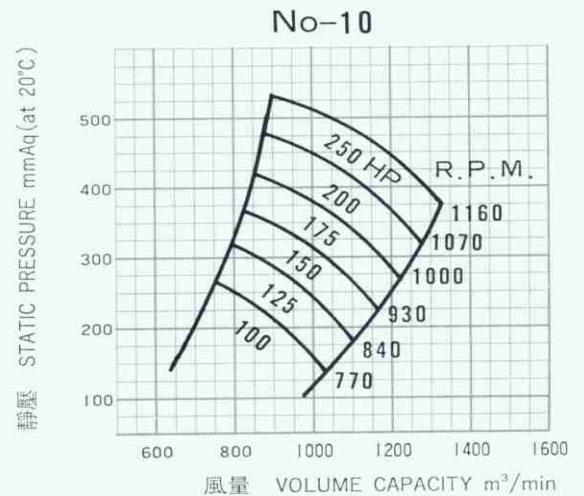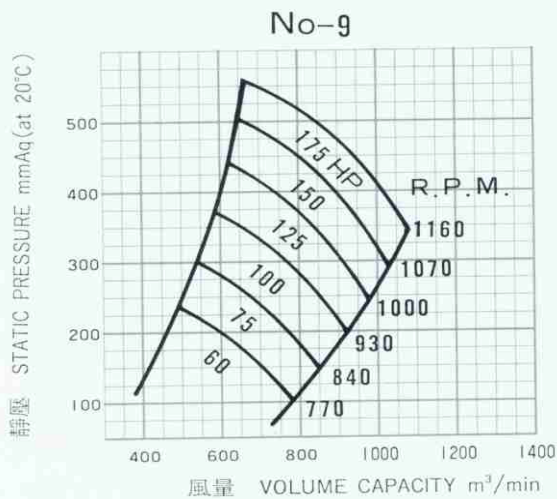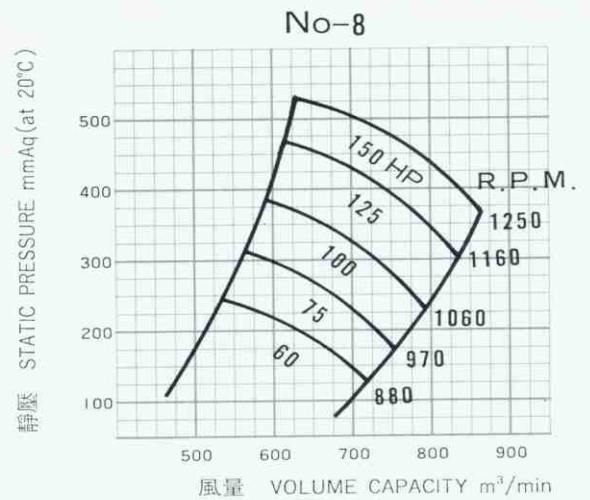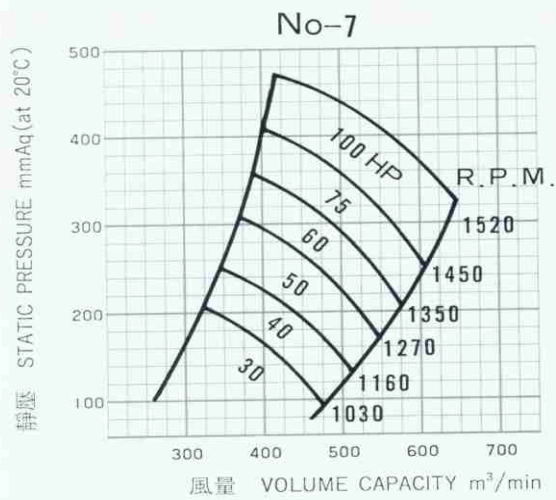

# PL

## 榮風直翼式離心吸塵抽送風機

### RONG FONG PLATE FANS

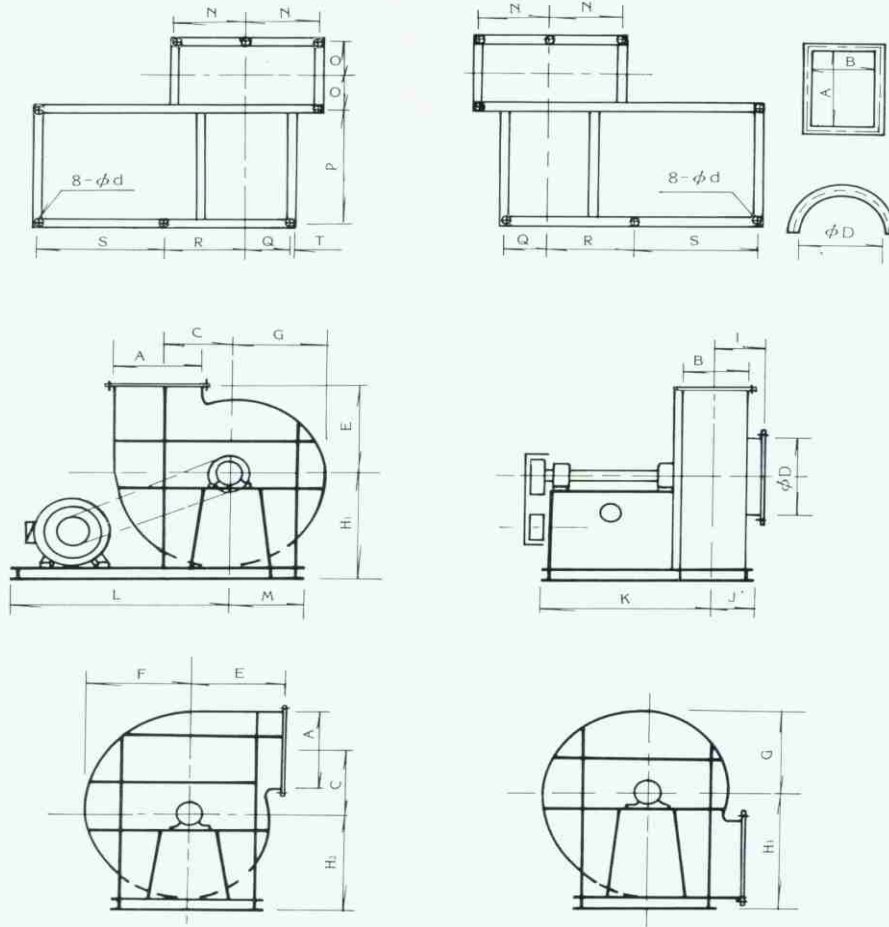

尺寸表 *Dimensions*

單位UNIT:mm

規格 型號	A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J	K	L	M	N	O	P	Q	R	S	T	φd
3	300	250	280	300	330	360	310	400	350	475	175	165	565	660	260	244	149	400	149	248	396	16	12
3 1/2	300	250	330	300	350	430	370	480	420	540	175	175	575	710	310	288	153	400	178	255	433	22	15
4	350	300	375	350	420	485	430	535	480	610	200	200	670	800	350	328	178	470	218	280	498	22	15
4 1/2	400	350	430	400	450	550	480	615	545	705	235	240	760	895	390	365	210	520	245	310	555	30	19
5	450	400	475	450	510	610	530	675	595	775	260	260	865	975	445	415	235	600	260	343	602	30	19
5 1/2	550	450	525	500	550	680	590	755	665	885	290	300	930	1045	495	460	265	630	300	355	655	30	19
6	600	500	570	550	630	760	660	865	760	980	320	300	1000	1110	510	488	278	700	308	390	698	22	19
6 1/2	650	500	625	600	650	835	720	960	845	1085	320	313	1033	1193	543	515	285	720	335	415	750	28	22
7	700	550	630	650	700	870	765	995	890	1125	345	338	1138	1243	593	565	310	800	335	440	775	28	22
8	850	700	725	850	770	1005	865	1155	1015	1320	430	425	1375	1435	685	650	390	950	390	505	895	35	22
9	950	800	825	950	870	1120	960	1320	1160	1525	500	475	1575	1555	755	720	440	1100	465	528	992	35	24
10	1100	900	900	1100	1060	1250	1150	1470	1370	1680	570	540	1790	1700	850	810	500	1250	525	568	1092	40	24
11	1250	1000	1025	1250	1100	1400	1170	1620	1390	1880	620	590	2000	1830	930	890	550	1500	550	620	1170	40	24
12	1450	1150	1125	1450	1190	1550	1290	1770	1510	2080	710	665	2315	2205	1005	965	625	1650	600	783	1382	40	24




# RSF

## 榮風翼截式離心抽送風機


### RONG FONG CENTRIFUGAL AIR-FLOW FANS

本機依飛機之翼截面原理，應用於風機之設計，有定載之特性不慮馬達超載，效率可達 85%，其噪音亦為風機中最低者，適用於乾燥機循環風扇，一般排氣換氣和強制輸送。


The fans construction are based on aero engines' airflow design. It performs very efficiently (up to 85%) with constant load and unlikely to be over loaded. It is the quietest among all the fans. Suitable for dryers, aircirculations, general ventilation and force air flow.

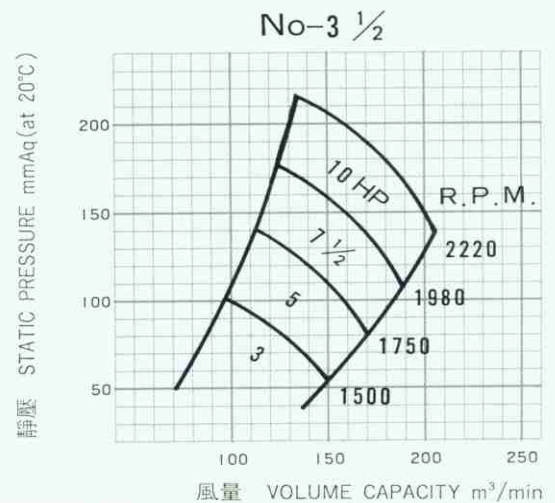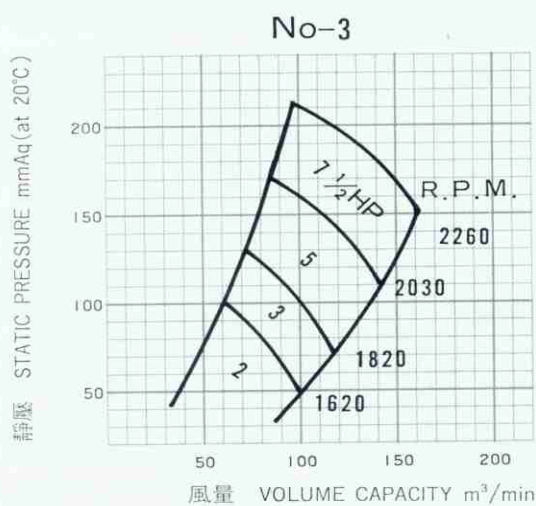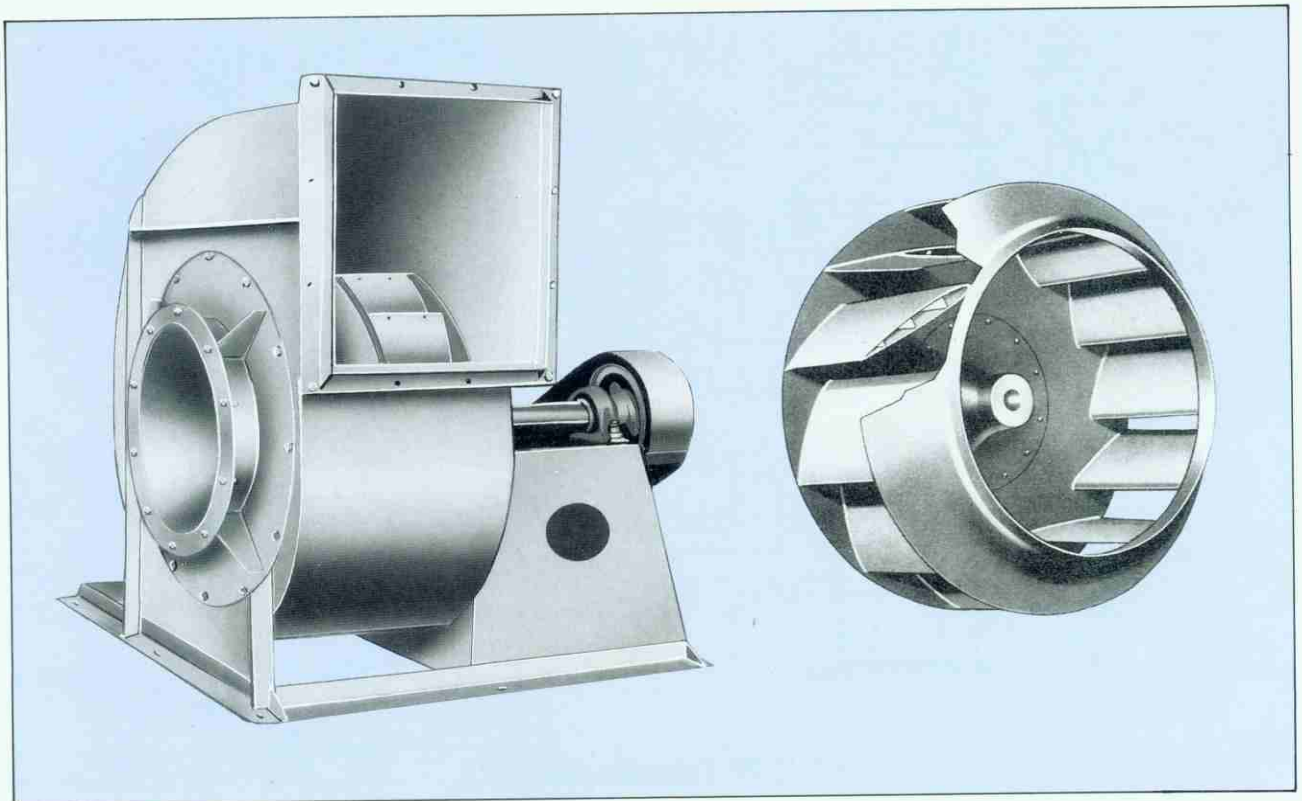


靜壓 STATIC PRESSURE mmAq (at 20°C)

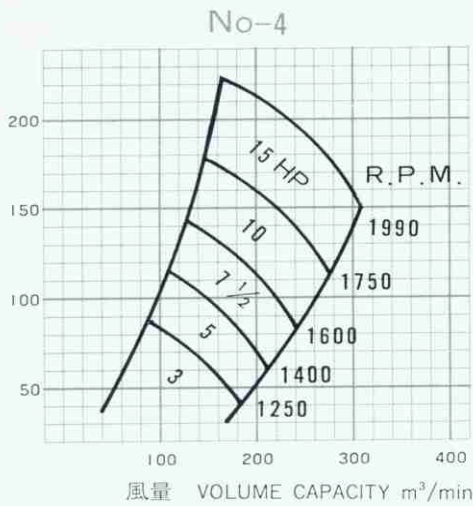


靜壓 STATIC PRESSURE mmAq (at 20°C)

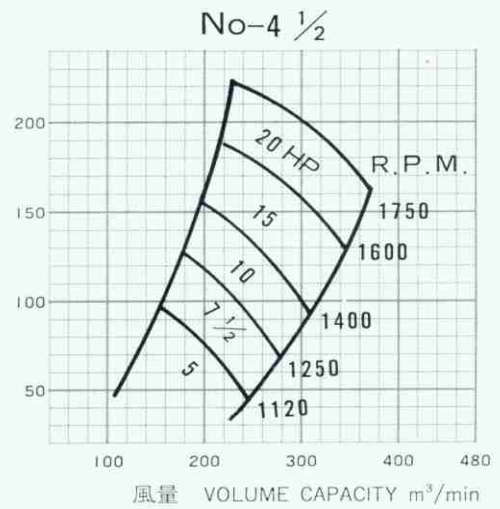


靜壓 STATIC PRESSURE mmAq (at 20°C)

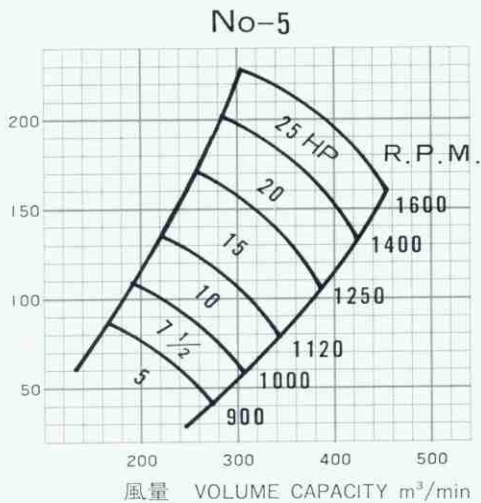


靜壓 STATIC PRESSURE mmAq (at 20°C)






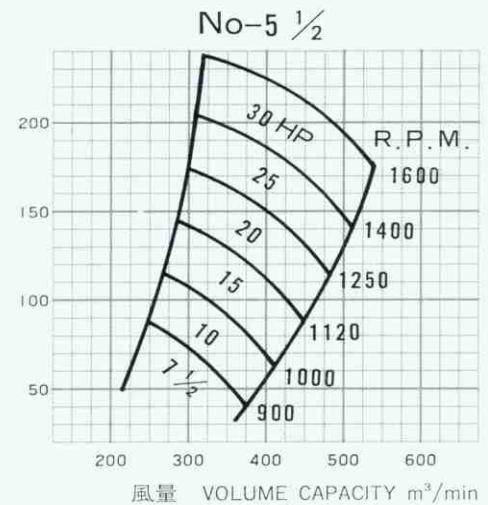



靜壓 STATIC PRESSURE mmAq (at 20°C)

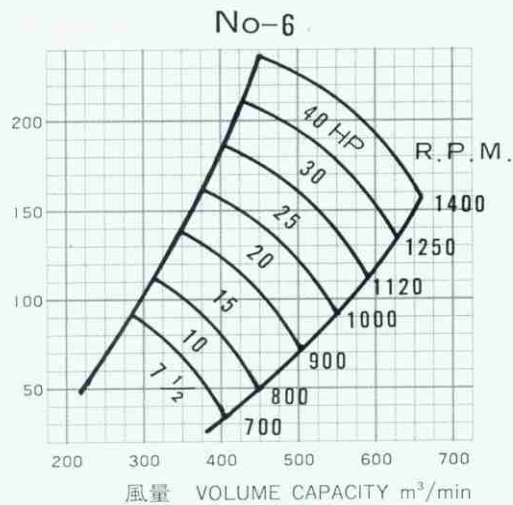

靜壓 STATIC PRESSURE mmAq (at 20°C)

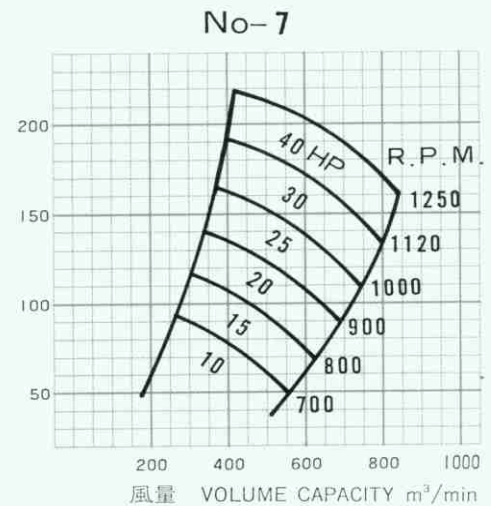

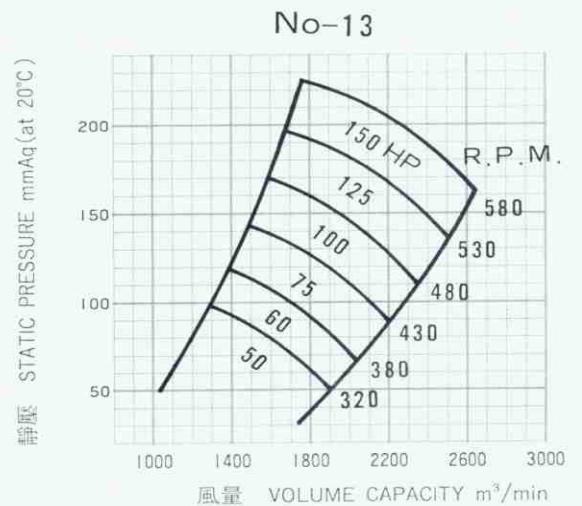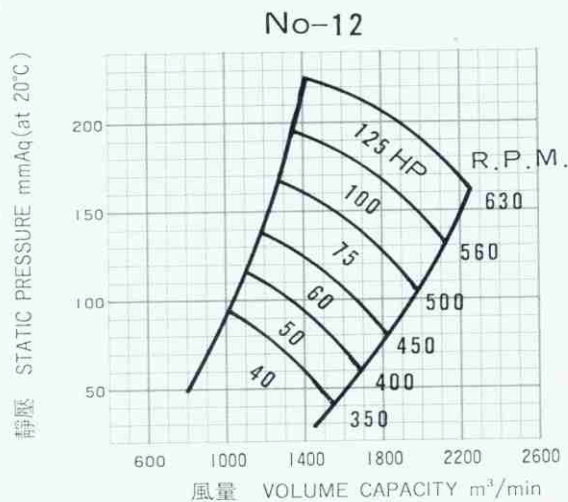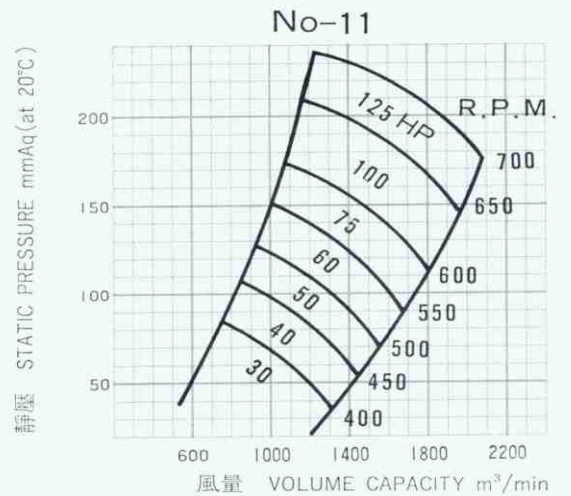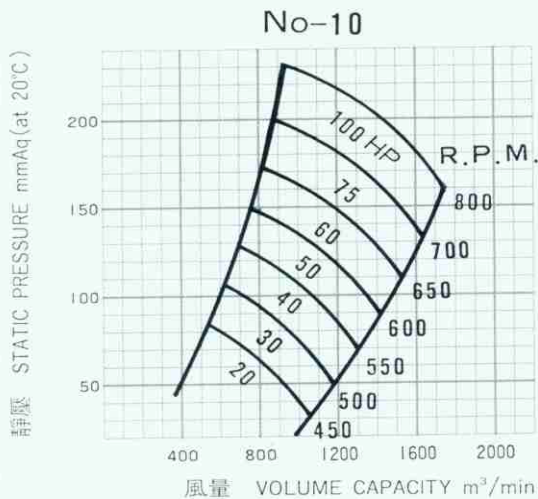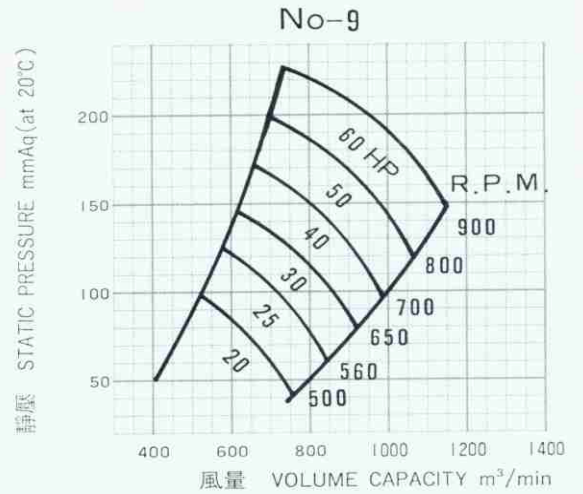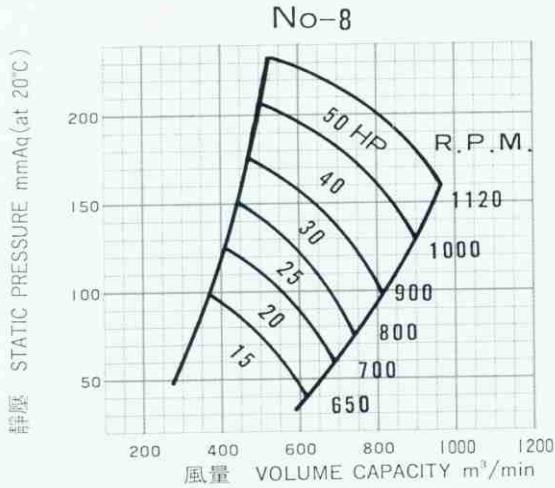

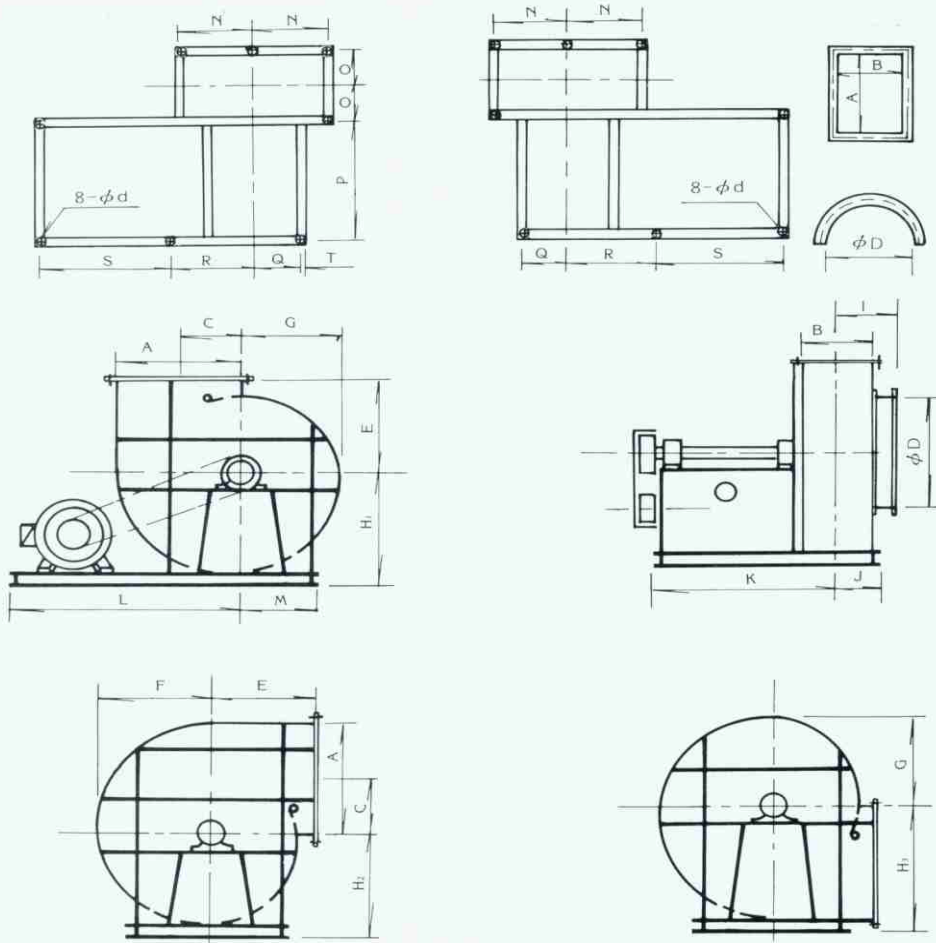

### 尺寸表 Dimensions

單位UNIT:mm

型號 編號	A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J	K	L	M	N	O	P	Q	R	S	T	φd
3	450	300	225	460	350	410	345	450	385	500	190	190	570	620	270	254	174	380	149	228	376	16	12
3 1/2	500	350	250	530	390	440	375	490	425	550	225	225	615	660	310	288	193	400	178	230	408	22	15
4	580	400	290	610	430	520	450	570	500	650	250	250	700	750	350	328	228	450	218	255	473	22	15
4 1/2	660	450	330	690	470	595	495	645	545	710	285	275	775	820	390	368	253	500	238	280	518	22	15
5	740	500	370	760	540	670	570	735	635	810	315	315	915	925	445	415	270	600	260	317	578	30	19
5 1/2	830	550	415	840	570	745	630	810	695	910	340	340	940	965	485	455	310	600	295	320	615	30	19
6	910	600	455	920	610	810	695	885	770	1015	380	375	1025	1015	535	500	340	650	320	330	650	35	19
7	1050	700	525	1070	730	950	790	1075	915	1225	450	413	1213	1193	593	565	385	800	335	415	750	28	22
8	1170	800	585	1220	790	980	830	1110	955	1320	500	463	1363	1273	673	645	435	900	385	430	815	28	22
9	1370	900	685	1370	960	1195	1030	1345	1180	1470	550	525	1625	1455	755	720	490	1100	465	477	943	35	22
10	1500	1000	750	1500	1050	1330	1145	1530	1345	1660	620	575	1775	1635	835	800	540	1200	515	543	1058	35	24
11	1700	1100	850	1700	1150	1450	1230	1650	1430	1920	680	640	1990	1710	910	870	600	1350	550	560	1110	40	24
12	1900	1200	950	1900	1250	1600	1370	1800	1570	2120	750	690	2190	1890	990	950	650	1500	600	625	1225	40	24
13	2100	1300	1050	2100	1400	1800	1560	2000	1760	2330	800	740	2390	2020	1070	1030	700	1650	650	665	1315	40	24






# RSF-B

## 榮風翼截式離心抽送風機(雙口式)

### RONG FONG CENTRIFUGAL AIRFLOW FANS (DOUBLE INLET)

本機配合雙入口，佔地小構造更堅實，密閉式之軸承配於兩旁，保養容易，壽命長，適用於一般空調及通風設備，將取代多翼式，廣泛使用。


This fan with double inlets is compact and robustly constructed. It is fitted with sealed lubricant bearings on both ends for easy maintenance, long and reliable service. This fan eventually supercedes SIROCO FANS.

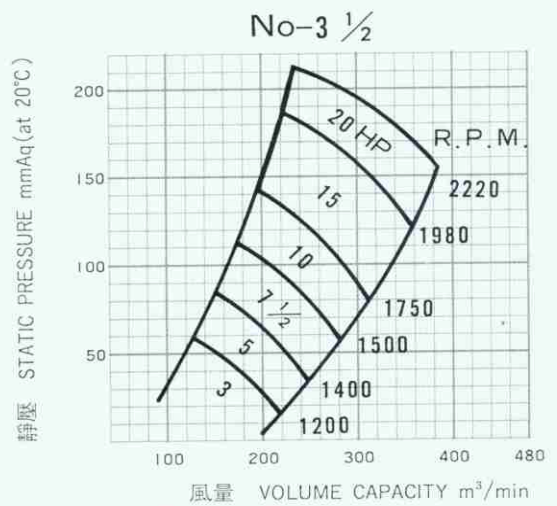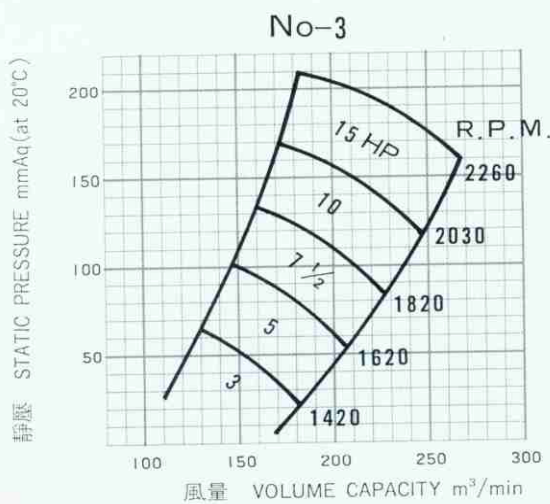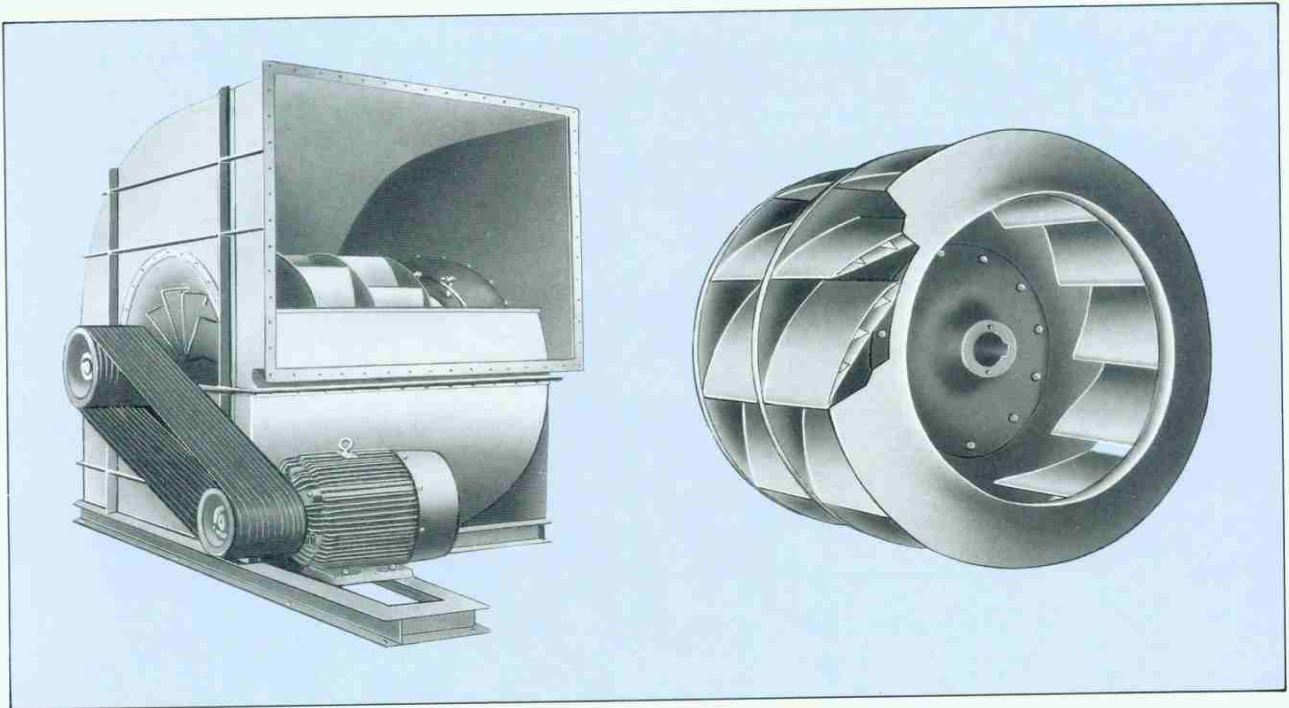


# RSF-B

## 榮風翼截式離心抽送風機(雙口式) RONG FONG CENTRIFUGAL AIRFLOW FANS (DOUBLE INLET)


靜壓 STATIC PRESSURE mmAq(at 20°C)

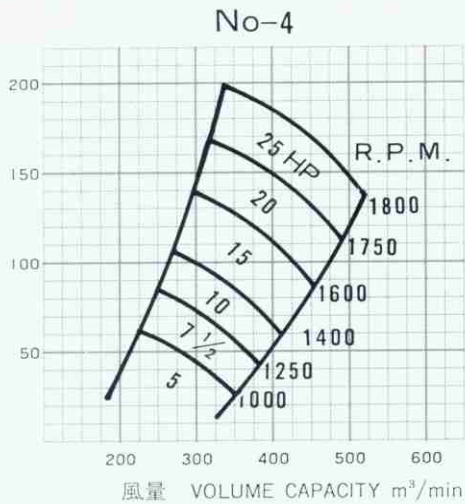


靜壓 STATIC PRESSURE mmAq(at 20°C)

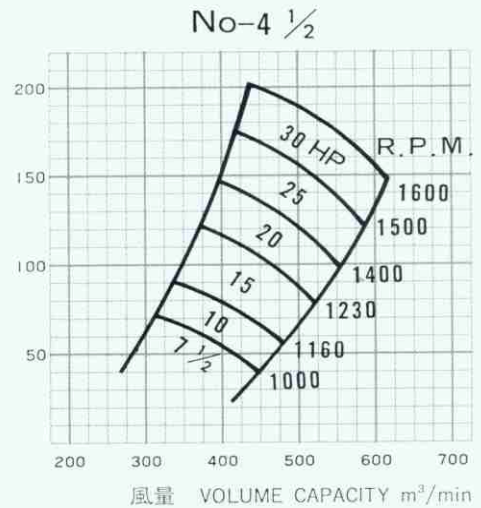


靜壓 STATIC PRESSURE mmAq(at 20°C)

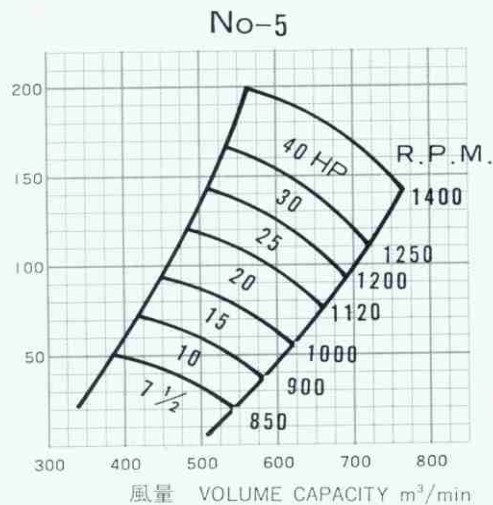


靜壓 STATIC PRESSURE mmAq(at 20°C)

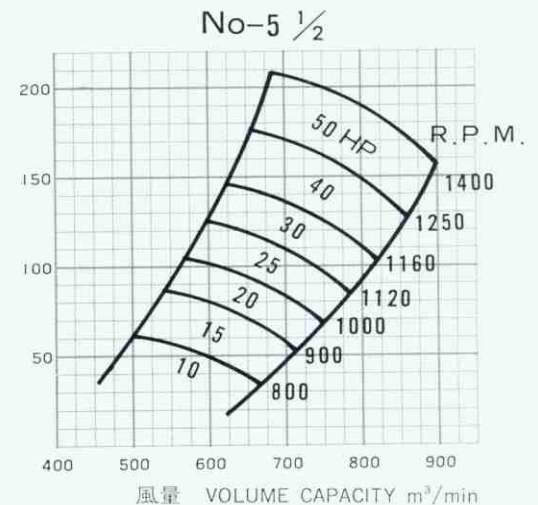

靜壓 STATIC PRESSURE mmAq(at 20°C)






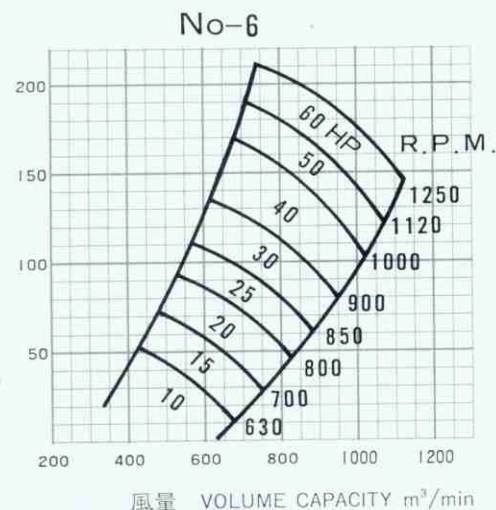


靜壓 STATIC PRESSURE mmAq(at 20°C)

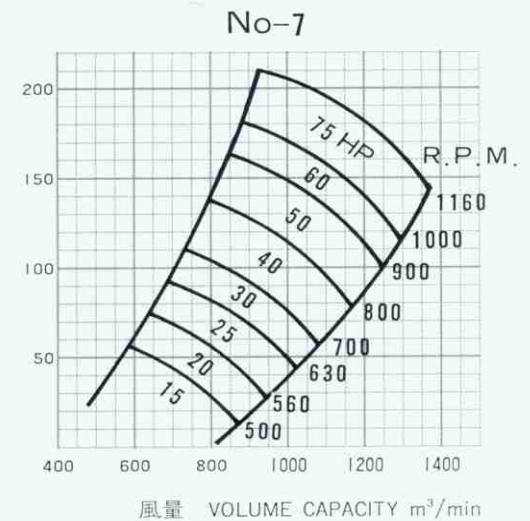

# RSF-B







## 榮風翼截式離心抽送風機(雙口式) RONG FONG CENTRIFUGAL AIRFLOW FANS (DOUBLE INLET)

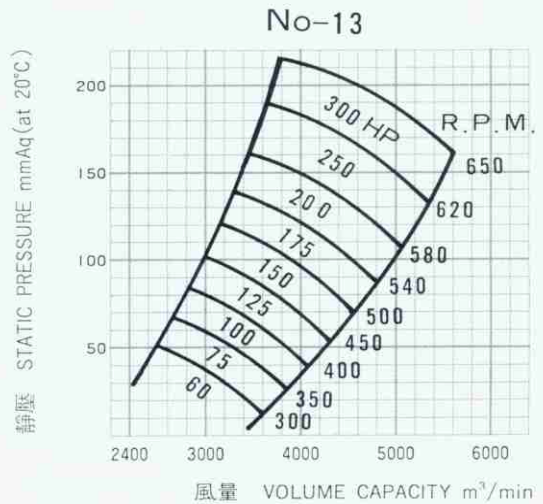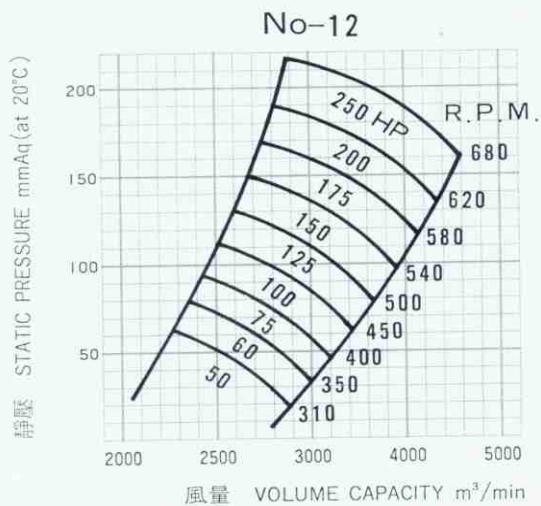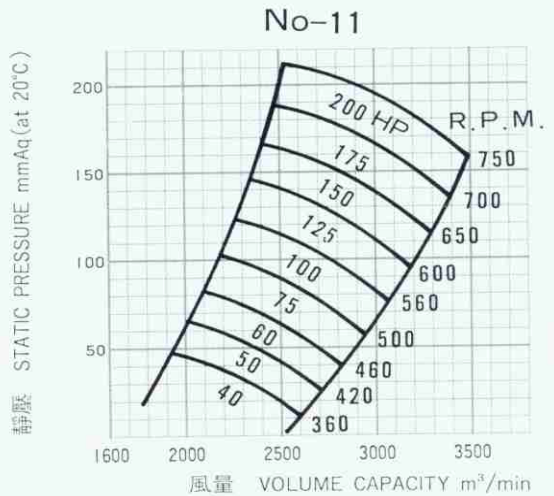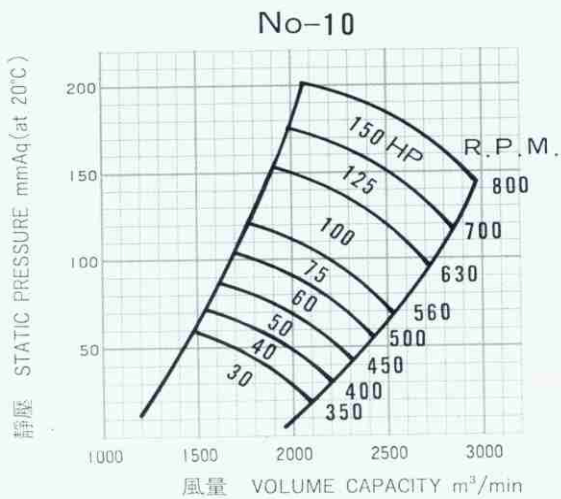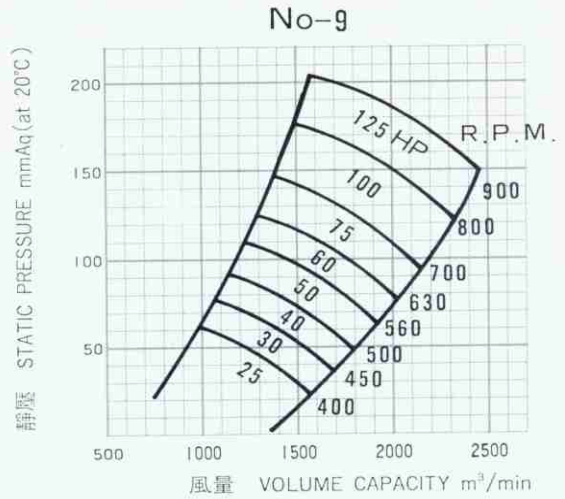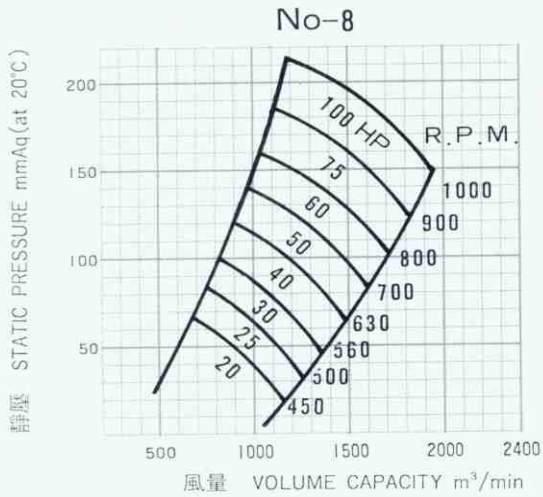

# RSF-B

## 榮風翼截式離心抽送風機(雙口式)

### RONG FONG CENTRIFUGAL AIRFLOW FANS (DOUBLE INLET)

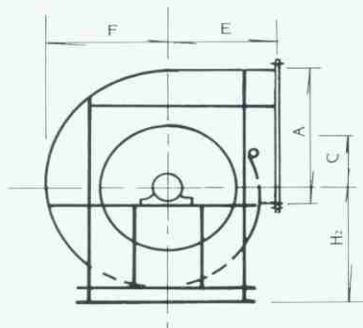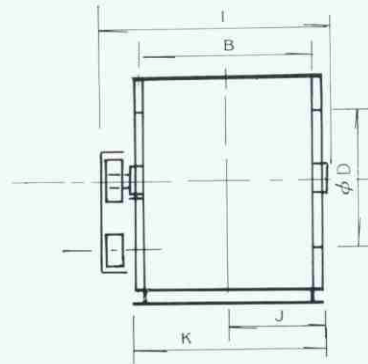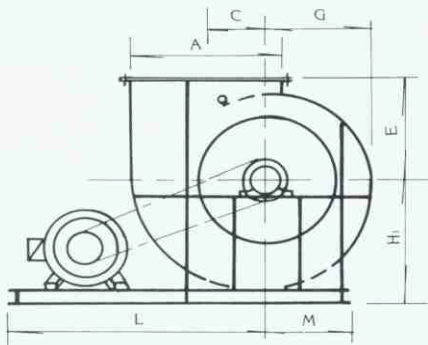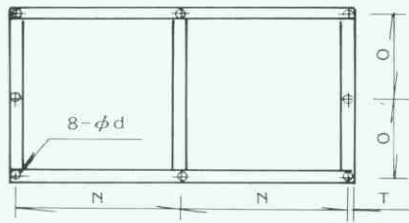

### 尺寸表 Dimensions


單位UNIT:mm

記號 編號	A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J	K	L	M	N	O	T	φd
3	480	600	210	460	350	410	345	460	390	510	860	650	700	910	320	593	328	16	12
3 1/2	560	700	220	530	390	440	375	490	425	550	960	400	800	1000	370	663	378	22	15
4	650	800	260	610	430	520	450	570	500	650	1100	450	900	1135	410	750	428	22	15
4 1/2	720	900	295	690	470	595	495	645	545	710	1220	500	1000	1205	460	810	475	22	15
5	800	1000	340	760	540	670	570	735	635	810	1320	565	1130	1355	505	900	535	30	19
5 1/2	900	1120	380	840	570	745	630	810	695	910	1450	625	1250	1445	545	965	595	30	19
6	1000	1250	415	920	610	810	695	885	770	1015	1600	700	1400	1590	605	1062	665	35	19
7	1120	1400	490	1070	730	950	790	1075	915	1225	1880	763	1526	1763	663	1185	735	28	22
8	1250	1600	545	1220	790	980	830	1110	955	1320	2150	836	1726	1933	733	1305	835	28	22
9	1420	1800	660	1370	960	1195	1030	1345	1180	1470	2430	975	1950	2295	825	1525	940	35	22
10	1600	2000	700	1500	1050	1330	1145	1530	1345	1660	2730	1075	2150	2475	905	1655	1040	35	24
11	1800	2200	850	1700	1150	1450	1230	1650	1430	1920	3030	1190	2380	2650	995	1782	1150	40	24
12	2000	2400	950	1900	1250	1600	1370	1800	1570	2120	3380	1290	2580	2900	1075	1947	1250	40	24
13	2250	2600	1050	2100	1400	1800	1560	2000	1760	2330	3750	1390	2780	3170	1160	2125	1350	40	24

# RB

## 榮風多翼離心式抽送風機

### RONG FONG SIROCO CENTRIFUGAL FANS

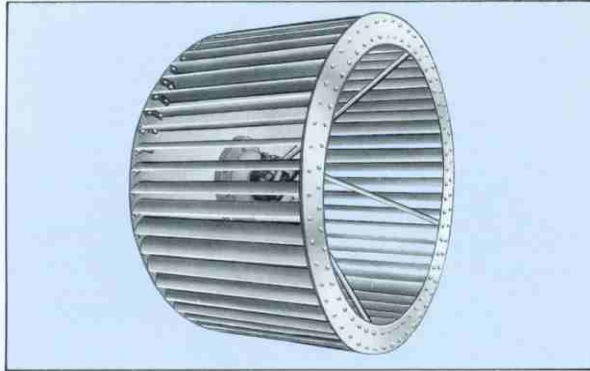

本機為低轉速之風機，且能輸出高風量之特性，低噪音，配合密閉式軸承壽命長，保養方便，適合一般通風換氣，廢氣排除及循環風扇。

This fans are designed for high volume of air flow at low revolution. It is fitted with sealed lubricant bearing for easy maintenance and long service.

Suitable for general air ventilation, circulation and exhaust system.

### 選擇及能量 Selections & Ratings

BHP=軸馬力應加 15~30% 指定馬力








BHP: Add 15-30% to axial (motor) h.p.

型 式	靜壓	15 mm	20 mm	25 mm	30 mm	40 mm	50 mm	60 mm	75 mm	90 mm	105 mm	125 mm
RB-2	CMM	26	30	33	37	42	47	52	58	64	69	75
	RPM	728	840	940	1030	1190	1330	1455	1630	1780	1925	2100
	BHP	0.16	0.25	0.34	0.46	0.70	0.97	1.27	1.78	2.33	2.96	3.82
RB-2 ½	CMM	41	47	53	58	66	74	82	91	100	108	118
	RPM	582	672	752	824	950	1060	1165	1330	1425	1540	1680
	BHP	0.25	0.38	0.54	0.70	1.08	1.51	1.99	2.77	3.64	4.60	5.96
RB-3	CMM	59	68	76	83	96	108	118	132	144	156	170
	RPM	485	560	626	686	792	886	970	1085	1190	1285	1400
	BHP	0.36	0.55	0.77	1.01	1.55	2.18	2.86	4.00	5.26	6.62	8.60
RB-3 ½	CMM	80	98	102	112	130	146	160	178	196	212	232
	RPM	416	480	537	588	678	760	832	930	1020	1100	1200
	BHP	0.49	0.75	1.05	1.38	2.12	2.98	3.90	5.44	7.16	9.00	11.7
RB-4	CMM	105	120	135	148	170	190	210	235	256	278	302
	RPM	364	420	470	515	595	665	728	815	890	963	1050
	BHP	0.64	0.98	1.38	1.80	2.77	3.87	5.10	7.12	9.30	11.8	15.3
RB-4 ½	CMM	132	152	172	186	242	246	265	296	325	350	328
	RPM	323	347	418	457	528	590	647	724	792	855	934
	BHP	0.81	1.24	1.74	2.28	3.52	4.89	6.43	9.02	11.8	14.9	19.3
RB-5	CMM	163	189	211	232	267	298	327	366	401	433	472
	RPM	291	336	376	412	475	531	582	650	713	770	840
	BHP	1.00	1.53	2.14	2.82	4.32	6.02	7.94	11.1	14.6	18.4	23.8
RB-5 ½	CMM	196	228	256	280	322	362	396	442	485	524	572
	RPM	264	306	342	374	432	483	534	592	648	700	764
	BHP	1.20	1.85	2.59	3.40	5.23	7.32	9.70	13.0	17.7	22.2	28.9
RB-6	CMM	236	272	304	334	385	430	472	526	578	625	680
	RPM	242	280	313	343	396	443	485	542	595	642	700
	BHP	1.43	2.21	3.07	4.05	6.23	8.72	11.4	16.0	21.0	26.5	34.4
RB-7	CMM	320	370	414	454	524	586	642	718	786	850	926
	RPM	208	240	268	294	339	380	416	465	510	550	600
	BHP	1.95	3.00	4.18	5.50	8.49	11.9	15.6	21.8	28.6	36.1	46.8
RB-8	CMM	418	484	540	594	684	764	838	936	1025	1110	1210
	RPM	182	210	235	258	297	332	364	407	445	482	525
	BHP	2.55	3.91	5.45	7.21	11.1	15.4	20.4	28.4	41.0	47.1	61.2
RB-9	CMM	532	612	685	750	866	968	1060	1190	1300	1405	1530
	RPM	162	187	209	229	264	295	324	362	396	428	467
	BHP	3.23	4.96	6.92	9.11	14.0	19.5	25.7	36.1	47.3	59.7	77.2
RB-10	CMM	655	750	845	925	1070	1190	1310	1460	1600	1730	1890
	RPM	146	168	188	206	238	266	291	325	356	385	420
	BHP	3.98	6.12	8.56	11.3	17.3	24.2	31.8	44.2	58.2	73.5	95.7

# RB

## 榮風多翼離心式抽送風機

## RONG FONG SIROCO CENTRIFUGAL FANS

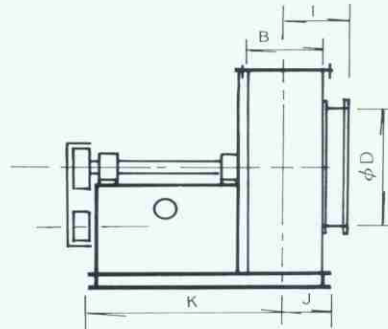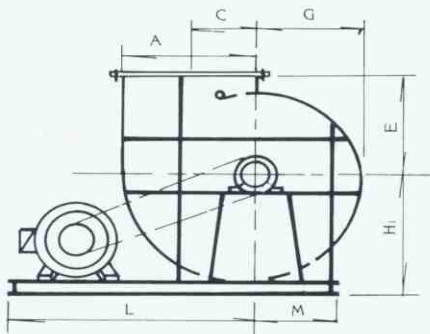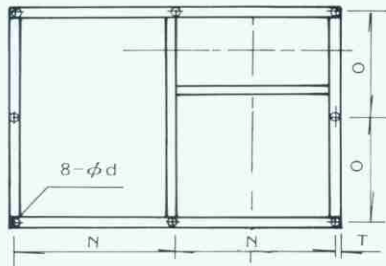

### 尺寸表 Dimensions


單位UNIT:mm

編號	A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J	K	L	M	N	O	T	φd
2	300	230	150	300	215	265	225	295	255	335	155	155	405	440	195	299	264	16	12
2 ½	380	300	190	380	280	330	280	370	320	430	190	190	490	530	230	364	324	16	12
3	450	350	225	460	350	410	345	450	385	500	225	215	595	620	270	429	389	16	12
3 ½	500	400	250	530	390	440	375	490	425	550	250	250	650	660	310	463	428	22	15
4	580	450	290	610	430	520	450	570	500	650	275	275	725	750	350	528	478	22	15
4 ½	660	500	330	690	470	595	495	645	545	710	310	300	800	820	390	583	528	22	15
5	740	550	370	760	540	670	570	735	635	810	340	340	940	925	445	655	610	30	19
5 ½	830	600	415	840	570	745	630	810	695	910	380	365	1015	965	485	695	660	30	19
6	910	650	455	920	610	810	695	875	760	990	405	390	1040	1005	525	735	685	30	19
7	1050	800	525	1070	730	950	790	1025	865	1150	500	475	1275	1105	605	820	840	35	19
8	1170	900	585	1220	790	980	830	1110	955	1320	550	513	1413	1273	673	946	936	28	22
9	1370	950	685	1370	960	1195	1030	1345	1180	1470	575	550	1650	1455	755	1070	1065	35	22
10	1500	1050	750	1500	1050	1330	1145	1530	1345	1660	645	600	1800	1635	835	1200	1165	35	24

# RB-B

## 榮風多翼離心式抽送風機(雙口式)

### RONG FONG SIROCO CENTRIFUGAL FANS (DOUBLE INLETS)

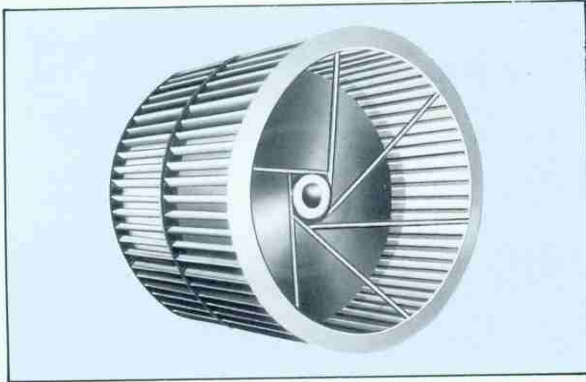

本機為雙入口之外型，構造簡單配合密閉式軸承於兩旁，保養方便壽命長，且能輸出最大之風量和低噪音，多使用於空調設備通風換氣和冷卻設備。

The fans are designed for double inlets. Its design and structure are simplified for easy maintenance and long life service. High volume of air flow can be achieved at very low noise level.

Suitable for air conditioning, ventilations and cooling systems.

BHP=軸馬力應加 15~30% 指定馬力







BHP: Add 15-30% to axial (motor) h.p.

### 選擇及能量 Selections & Ratings

型式	靜壓	16 mm	20 mm	25 mm	32 mm	40 mm	45 mm	50 mm	63 mm	80 mm	90 mm	100 mm
RBB-2	CMM	50.0	58.0	65.0	72.0	81.0	90.0	101.0	112	121	130	137
	RPM	722	810	912	1010	1135	1212	1270	1460	1635	1736	1836
	BHP	0.30	0.12	0.60	0.85	1.20	1.54	1.71	2.76	3.68	4.42	5.22
RBB-2 ½	CMM	80.0	90.0	101	112	127	140	157	165	175	189	203
	RPM	586	650	730	810	916	970	1040	1440	1300	1378	1450
	BHP	0.46	0.67	0.93	1.32	1.92	2.41	3.05	3.94	5.22	6.32	7.53
RBB-3	CMM	127	145	165	180	203	224	254	265	280	304	330
	RPM	461	510	570	640	723	766	815	909	1030	1087	1150
	BHP	0.75	1.07	1.51	2.13	3.00	3.85	4.90	6.35	8.37	10.1	12.0
RBB-3 ½	CMM	157	180	203	224	254	280	315	330	350	378	405
	RPM	416	459	515	580	652	686	730	809	920	975	1030
	BHP	0.93	1.32	1.88	2.65	3.75	4.82	6.12	7.93	10.4	12.6	15.0
RBB-4	CMM	203	330	360	405	425	450	487	523	545	586	660
	RPM	365	405	480	538	600	640	670	750	836	887	946
	BHP	1.20	1.70	4.15	5.76	7.38	8.85	10.5	13.6	17.8	21.1	27.0
RBB-4 ½	CMM	250	285	325	360	405	450	500	529	560	605	650
	RPM	325	360	456	458	510	543	580	640	730	771	815
	BHP	1.50	2.11	3.71	4.23	5.98	7.70	9.76	12.6	16.7	20.2	23.9
RBB-5	CMM	315	360	405	450	508	560	630	664	700	760	810
	RPM	292	325	365	405	458	485	520	572	650	690	725
	BHP	1.87	2.65	3.65	5.30	7.50	9.64	12.2	15.8	20.9	25.3	30.1
RBB-5 ½	CMM	405	462	523	580	650	720	810	848	900	970	1040
	RPM	258	285	322	360	404	428	456	505	575	608	640
	BHP	2.41	3.40	4.82	6.80	9.62	12.3	15.6	20.3	26.8	32.4	38.5
RBB-6	CMM	500	580	650	730	825	900	1000	1060	1120	1120	1320
	RPM	230	256	288	321	362	383	411	452	512	544	576
	BHP	3.00	4.24	6.03	8.49	12.0	15.4	19.5	25.3	33.5	40.4	48.2
RBB-7	CMM	615	700	800	879	986	1010	1220	1323	1380	1514	1600
	RPM	206	230	258	290	324	343	369	406	460	487	515
	BHP	3.76	5.32	7.90	10.5	15.8	19.2	24.5	31.6	41.8	50.6	60.3
RBB-8	CMM	780	800	1110	1120	1250	1400	1550	1584	1750	1812	2030
	RPM	186	206	258	258	291	308	330	363	412	438	462
	BHP	4.62	6.53	11.4	13.0	18.4	23.7	30.1	38.9	51.5	62.4	74.3
RBB-9	CMM	975	1120	1270	1140	1570	1750	1950	2052	2180	2347	2520
	RPM	166	185	206	233	261	276	395	325	370	391	412
	BHP	5.82	8.24	11.6	16.4	23.3	29.8	37.9	49.1	64.8	78.3	93.1
RBB-10	CMM	1259	1438	1631	1800	2025	2250	2519	2650	2813	3031	3263
	RPM	146	162	180	203	229	242	260	286	325	344	364
	BHP	7.16	10.5	15.0	21.1	30.5	38.3	48.7	62.9	83.2	100	120

# RB-B

## 榮風多翼離心式抽送風機(雙口式) RONG FONG SIROCO CENTRIFUGAL FANS(DOUBLE INLETS)

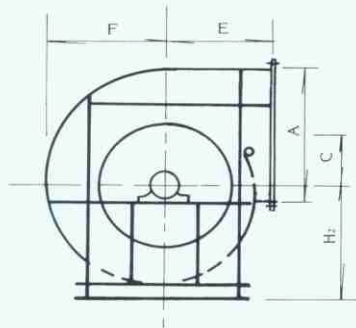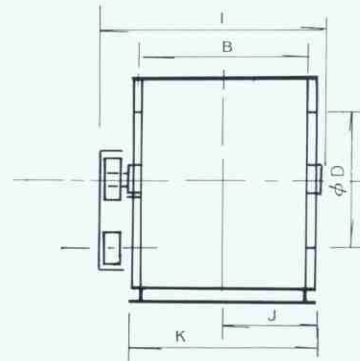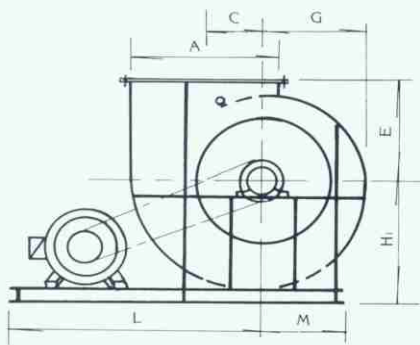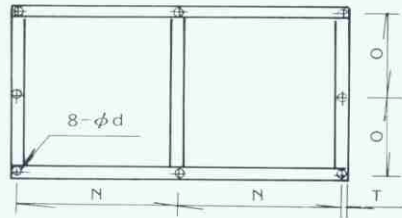

### 尺寸表 Dimensions

單位UNIT:mm

型號 編號	A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J	K	L	M	N	O	T	φd
2	330	360	135	300	215	265	225	295	255	335	580	220	440	600	230	395	204	16	12
2 ½	410	460	175	380	280	330	290	370	320	430	690	270	540	770	280	509	254	16	12
3	480	600	210	460	350	410	345	460	390	510	860	350	700	910	320	593	328	22	15
3 ½	560	700	220	530	390	440	375	490	425	550	960	400	800	1000	370	663	378	22	15
4	650	800	260	610	430	520	450	570	500	650	1100	450	900	1135	410	750	428	22	15
4 ½	720	900	295	690	470	595	495	645	545	710	1220	500	1000	1205	460	810	475	22	15
5	800	1000	340	760	540	670	570	735	635	810	1320	565	1130	1355	505	900	535	30	19
5 ½	900	1120	380	840	570	745	630	810	695	910	1450	625	1250	1445	545	965	595	30	19
6	1000	1250	415	920	610	810	695	885	770	1015	1600	700	1400	1590	605	1062	665	30	19
7	1120	1400	490	1070	730	950	790	1075	915	1225	1880	763	1526	1763	663	1185	735	35	19
8	1250	1600	545	1220	790	980	830	1110	955	1320	2150	863	1726	1933	733	1305	835	28	22
9	1420	1800	660	1370	960	1195	1030	1345	1180	1470	2430	975	1950	2295	825	1525	940	35	22
10	1600	2000	700	1500	1050	1330	1145	1530	1345	1660	2730	1075	2150	2475	905	1655	1040	35	24



# RD


## 榮風多翼直結式抽送風機

### RONG FONG SIROCO DIRECT-COUPLING FANS

本機為馬達直結驅動式，性能佳佔地小，風量大且噪音低，葉片經沖壓成型，角度正確對氣流之安穩性優良，適用於小型場所之通風換氣等。

The fans are driven directly by the motors. Its press-processed blades are accurately shaped which allows great volume of air flow and very quiet in operation.

It is compact and well suited for confine areas.

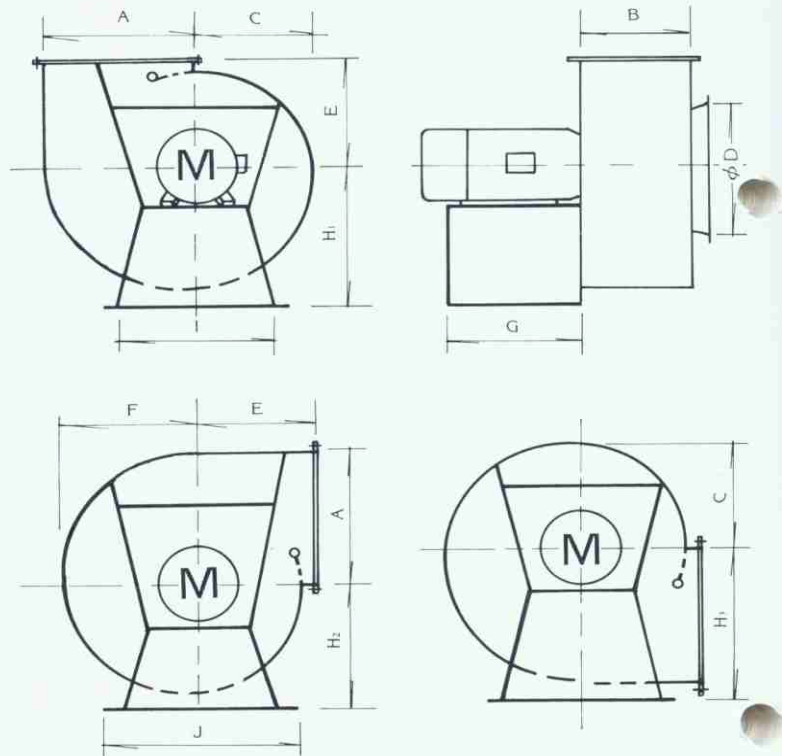

### 選擇及能量 Selections & Ratings

型式 TYPE	馬 達		風 量 m <sup>3</sup> /min	靜 壓 mmAq	尺 寸 (Dimensions) mm											
	HP	RPM			A	B	C	φD	E	F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	I	J
RD-1 1/2	1/2	1750	26	45	230	160	180	240	185	210	170	235	205	275	200	260
RD-1 3/4	1/2	1160	40	20	255	170	200	275	195	230	190	260	230	300	230	300
RD-1 3/4	1	1750	34	50	255	170	200	275	195	230	190	260	230	300	230	300
RD-1 3/4	2	1750	50	50	255	185	200	275	195	230	220	260	230	300	230	300
RD-2	2	1160	75	35	300	210	225	320	215	265	220	295	255	350	260	340
RD-2	3	1750	61	75	300	210	225	320	215	265	240	295	255	350	260	340
RD-2 1/2	5	1750	100	90	380	250	280	380	275	330	250	370	320	440	330	410
RD-2 1/2	7 1/2	1750	110	105	380	300	280	380	275	330	280	370	320	440	330	410